

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
WO 2004/026716 A1

(51) International Patent Classification<sup>7</sup>: B65D 30/10, 30/00

(21) International Application Number:  
PCT/US2003/029140

(22) International Filing Date:  
16 September 2003 (16.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/411,939 17 September 2002 (17.09.2002) US

(71) Applicant and

(72) Inventor: POUCHKAREV, Alexander, S. [RU/US]; 150 W. Oak Knoll Drive, San Anselmo, CA 94960 (US).

(74) Agents: JOHNSON, Larry, D. et al.; Johnson & Stainbrook, LLP, 3558 Round Barn Blvd., Suite 203, Santa Rosa, CA 95403 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: MULTILAYERED PRESSURE VESSEL AND METHOD OF MANUFACTURING THE SAME

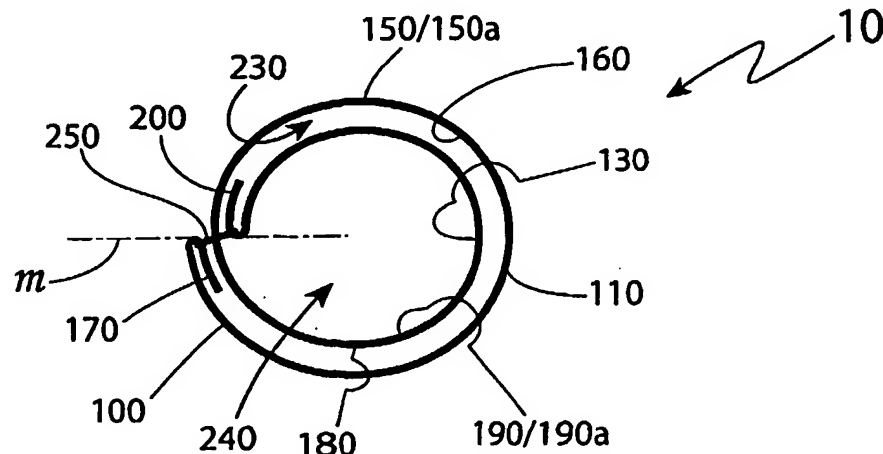

(57) Abstract: A multilayered pressure vessel (10) fabricated from at least one single ply sheet of flexible material (100) having an approximate longitudinal midline which divides the material into an inner portion (130) having an inner surface, an outer surface, an edge, a seam allowance, and a width, and an outer portion having an inner surface, an outer surface, an edge, a seam allowance, and a width. The width of the outer portion (120) is greater than the width of the inner portion (140). A primary seam (250) binds the outer portion and the inner portion to the material sheet at the midline proximate the outer portion edge and inner portion edge. The sheet (100) is wrapped into a continuous substantially 720 degree wrap to form a generally cylindrical vessel body having possible multiple fluid passageways, at the election of the user. The primary seam (250) is concealed.

WO 2004/026716 A1